



THE NEW SA SERIES

The ideal solution for technical applications
with reduced weight

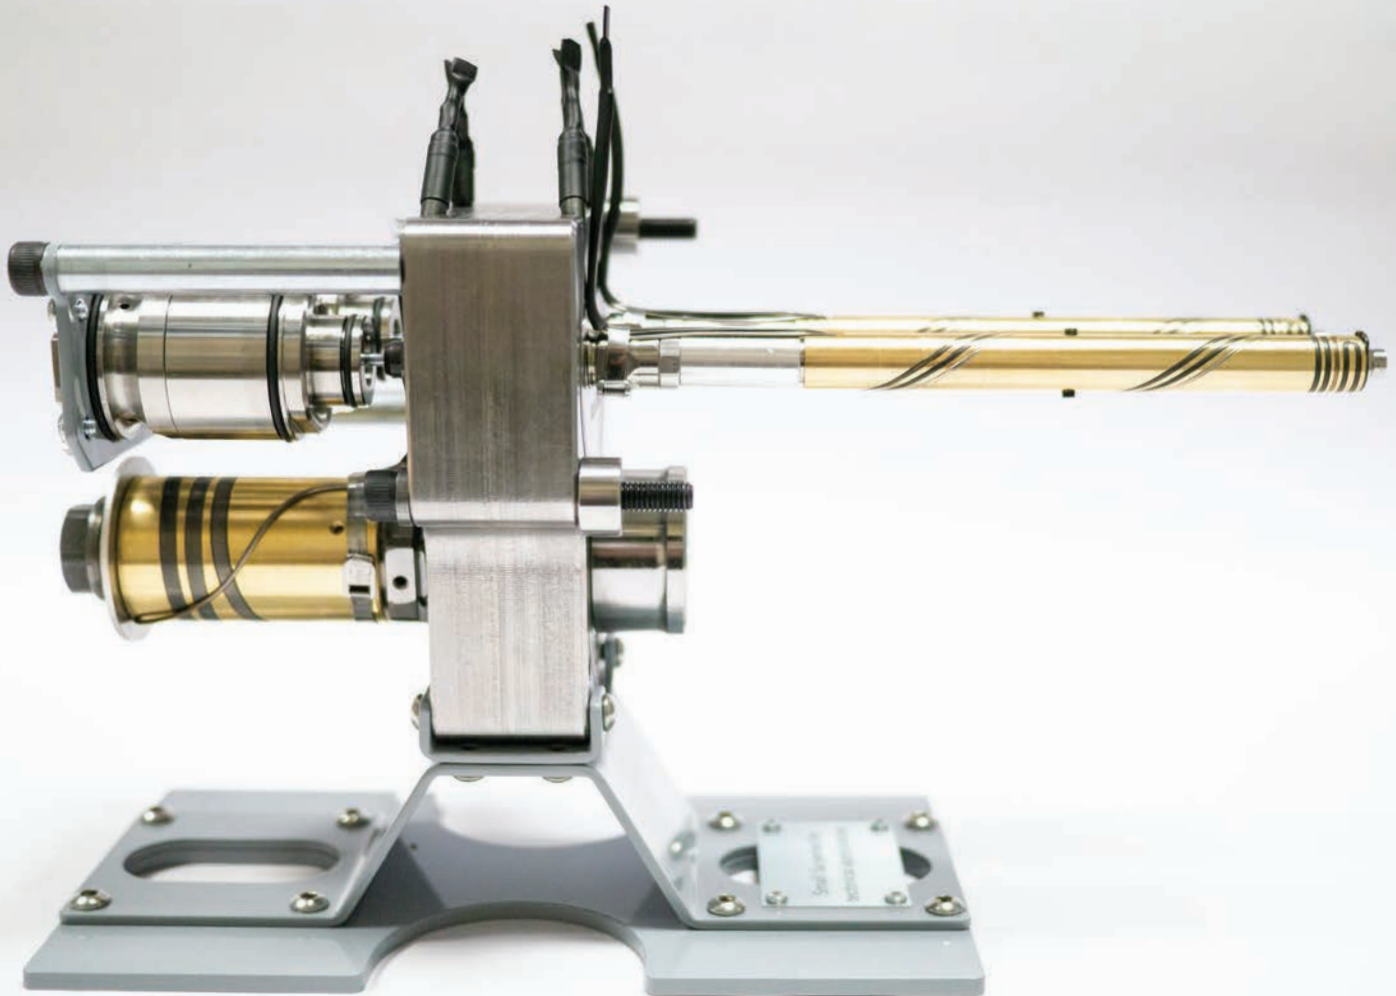

*Passion for
expertise*

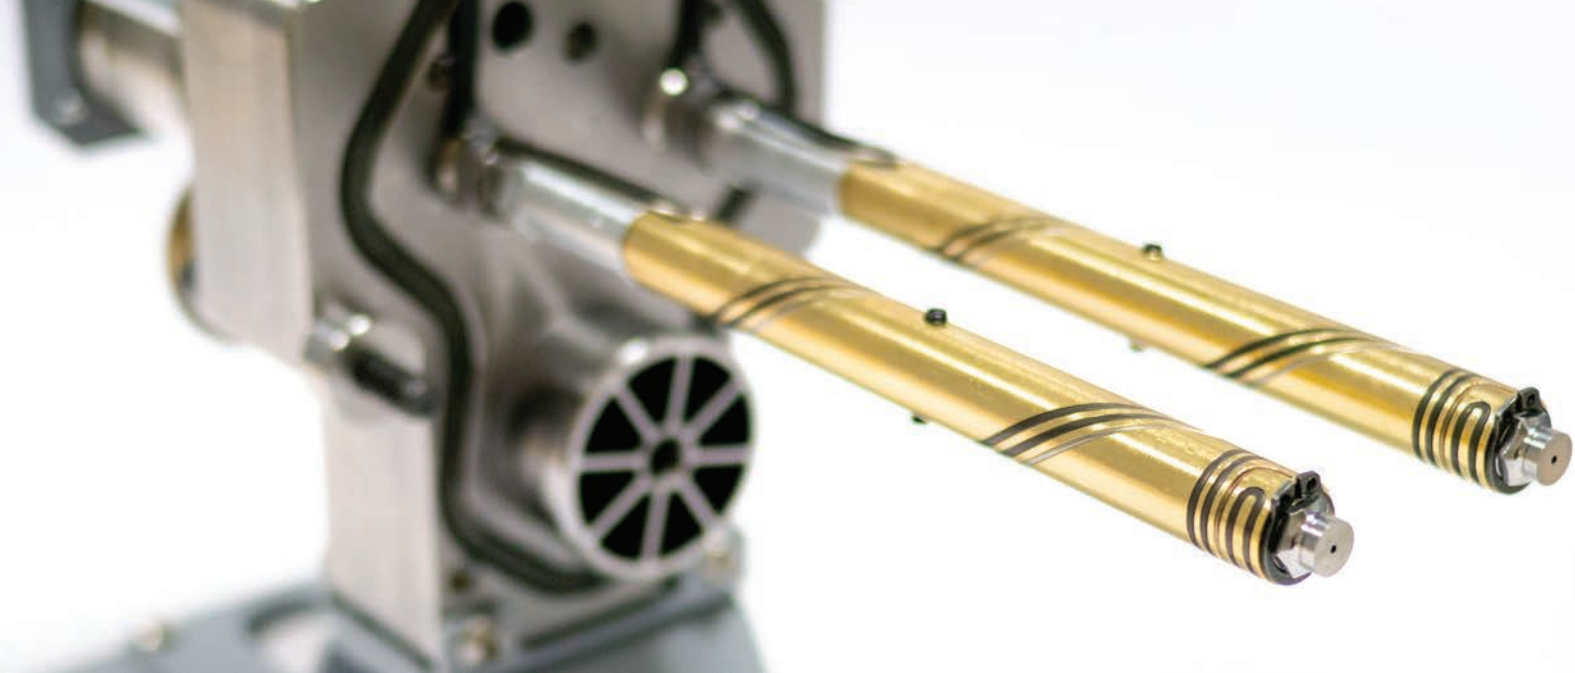

Suitable for processing techno-polymers applications, the new SA Nozzle Series is the ideal solution for technical applications with reduced weight (> 0.5 g) and thickness for all future challenges.

Main Benefits

- > **High flow rate:** thanks to wide channel section, it's ideal for fast injection even with reinforced or viscous polymers.
- > **Compact solution:** the reduction of the cut out allows for obtaining a compact seat of the mold and reduces the pitch between 2 adjacent nozzles.
- > **High pressure resistance:** the screwed-in nozzle solution is highly reliable as minimize the possibility of material leakages due to tool machining mistakes or wrong assembly operations.
- > **High aesthetical quality:** of the part with reduced weight and thickness: Sa Nozzle series has been optimized to reach the best thermal layout on nozzles ensuring the correct material management. Thanks to gate design is possible to inject components with a weight less than 1 gram and thickness less than 1 mm.
- > **Suitable for techno-polymers:** thanks to the special design of the tip and the end ring, the temperature in the gate area is optimized to process techno-polymers with a narrow process window (such as PA66, PBT ...)

FIELD OF APPLICATIONS

The solution is for automotive and non-automotive parts: from technical applications to houseware and logistics & environmental sectors.



Technical Features


- > Screwed-in solution.
- > Available for Open Nozzle and Valve gate. All configurations are available with bushing through the cavity or gate on the cavity.
- > Suitable for aesthetic parts, applications requiring color change, glass fiber and family tools.
- > Ideal solution for overmolding, painting & coating.
- > Available also for stack mold technology.
- > Processable materials: PA6, PA66, PBT, POM, rubber, PP, PE, EPDM, ABS, PS, SAN, PC, PMMA and much more materials under evaluation of our application engineer experts.

THERMAL GATE INJECTION

Nozzle cut out	Ø 20 mm
Nozzle length	60 ÷ 210 mm
Ø Nozzle channel	Ø 6 ÷ 4 mm
Hot runner manifold	40 mm (cut out 65 mm)
Nozzle-inlet minimum pitch	40 mm
Nozzle minimum pitch	30 mm

VALVE GATE INJECTION

Nozzle cut out	Ø 20 mm
Nozzle length	60 ÷ 210 mm
Ø Nozzle channel	Ø 6 ÷ 5 mm
Hot runner manifold	40 mm (min cut out 120 mm)
Nozzle-inlet minimum pitch	70 mm
Nozzle minimum pitch	40 mm

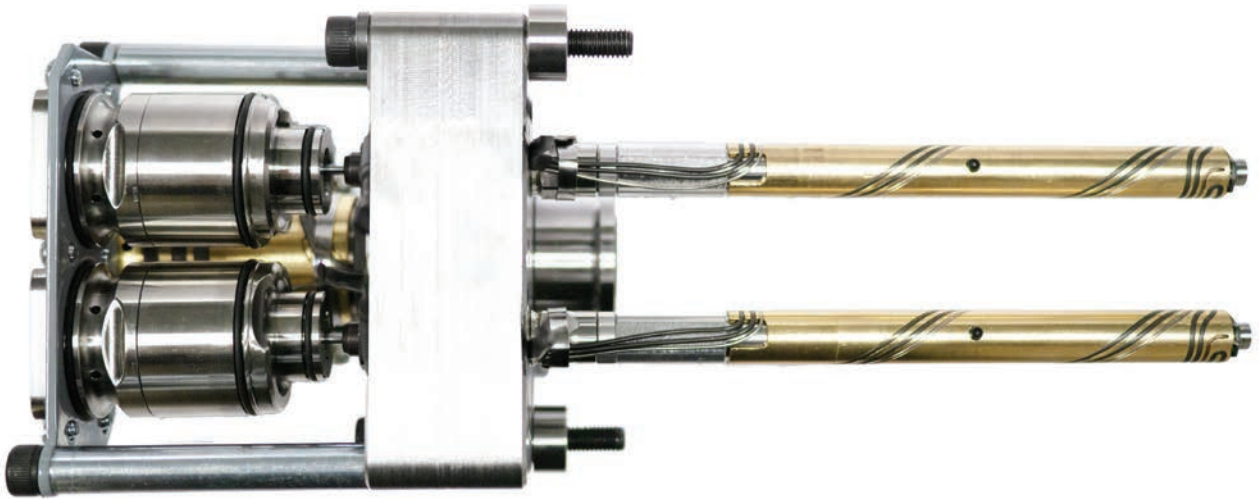



*Passion for
expertise*

Via Piave, 4
31020 S.Polo di Piave (TV) I
Tel. +39 0422 750111
Fax. +39 0422 750301
info@hrsflow.com www.hrsflow.com



Space for contact reference